

TISAFLEX[®] HR

CHARACTERISTICS



Excellent abrasion resistance



Working temperature
-75°C +150°C



Lightweight

TYPICAL APPLICATIONS




TISAFLEX[®] HR is a tubular braided sleeve made from E-CTFE Halar[®] monofilaments. It will hold cables and provides a good mechanical protection in complex environments (high temperature, chemicals and fire).

BENEFITS

- Very easy to install thanks to its 1:3 expansion ratio
- Particularly suitable to mechanical protection of cables for military and aeronautic industries
- Particularly suitable to protect alarm wires and to prevent easy cutting

OPTIONS & FINISH



- Packaging: Reels, cut lengths upon request
- Colour: White, red with two identification black yarns.

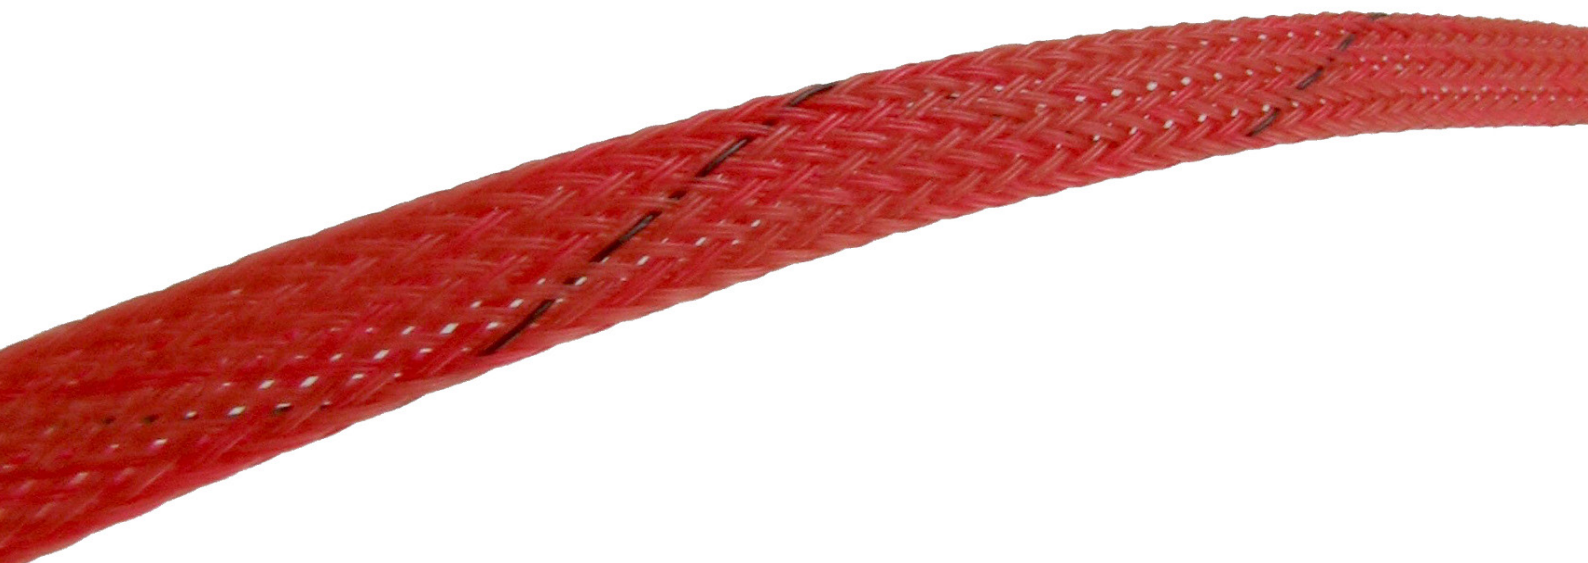

P/N	Size (inches)/(mm)	RANGE OF USE		PACKAGING
		Min (mm)	Max (mm)	Reel (m)
HR012-9/300	1/8 (3.2)	2.4	6.4	300
HR025-9/300	1/4 (6.4)	3.2	9.5	300
HR038-9/150	3/8 (9.5)	4.7	15.9	150
HR050-9/150	1/2 (12.7)	6.4	19.1	150
HR075-9/75	3/4 (19.1)	12.7	31.8	75
HR125-9/75	1-1/4 (31.8)	19.1	44.5	75

Ordering code (e.g. ø12.7mm white):

HR050-9/150

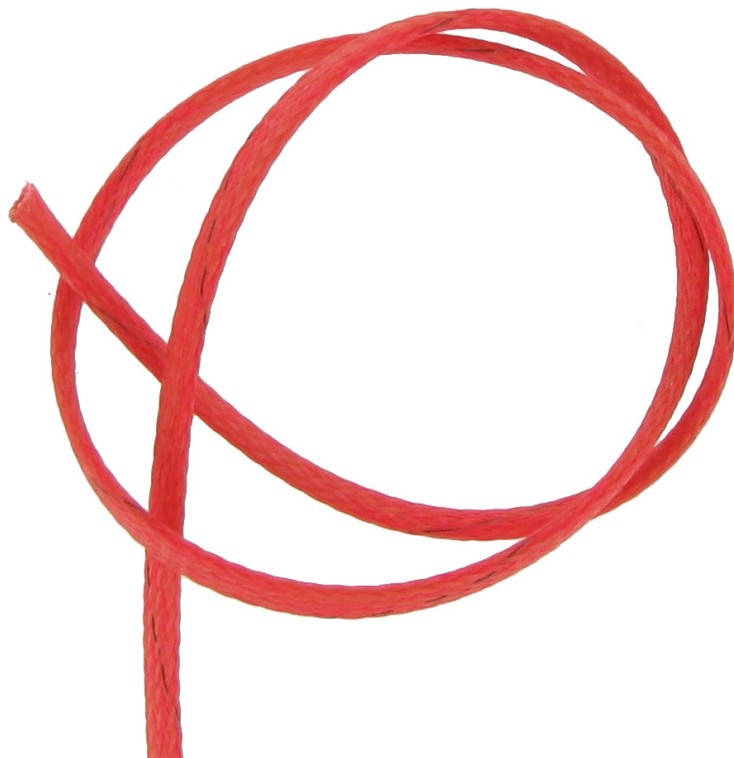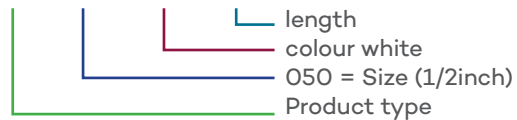

The information and illustrations given herein are believed to be reliable. Tresse-Industrie makes no warranties as to their accuracy or completeness and disclaims any liability in connection with their use. Tresse-Industrie's only obligations are those in the standard terms of sale for this product and Tresse-Industrie will not be liable for any consequential or other damages arising out of the use or misuse of this product. Users should make their own evaluation to determine the suitability of the product for specific applications.